(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

---

(54) Title: A HEARING PROSTHESIS WITH AUTOMATIC CLASSIFICATION OF THE LISTENING ENVIRONMENT

(57) Abstract: The invention relates to a hearing prosthesis and method that provide automatic identification or classification of a listening environment by applying one or several predetermined Hidden Markov Models to process acoustic signals obtained from the listening environment. The hearing prosthesis may utilise determined classification results to control parameter values of a predetermined signal processing algorithm or to control a switching between different pre-set listening programs so as to optimally adapt the signal processing of the hearing prosthesis to a given listening environment.

WO 01/76321 A1

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

A HEARING PROSTHESIS WITH AUTOMATIC CLASSIFICATION OF THE LISTENING ENVIRONMENT

FIELD OF THE INVENTION

5

The present invention relates to a hearing prosthesis and method providing automatic identification or classification of a listening environment by applying one or several predetermined Hidden Markov Models to process acoustic signals obtained from the listening environment. The hearing prosthesis may utilise determined classification results

10 to control parameter values of a predetermined signal processing algorithm or to control a switching between different pre-set listening programs so as to optimally adapt the signal processing of the hearing prosthesis to a given listening environment.

BACKGROUND OF THE INVENTION

15

Today's digitally controlled or Digital Signal Processing (DSP) hearing instruments are often provided with a number of pre-set listening programs. These pre-set listening programs are often included to accommodate a comfortable and intelligible reproduced sound quality in differing listening environments. Audio signals obtained from these

20 listening environments may have highly different characteristics, e.g. in terms of average and maximum sound pressure levels (SPLs) and/or frequency content. Therefore, for DSP based hearing prosthesis, each type of listening environment may require a particular setting of algorithm parameters of a signal processing algorithm of the hearing prosthesis to ensure that the user is provided with an optimum reproduced signal quality

25 in all types of listening environments. Algorithm parameters that typically could be adjusted from one listening program to another include parameters related to broadband gain, corner frequencies or slopes of frequency-selective filter algorithms and parameters controlling e.g. knee-points and compression ratios of Automatic Gain Control (AGC) algorithms. Consequently, today's DSP based hearing aids are usually provided with a

30 number of different pre-set listening programs, each tailored to a particular listening environment and/or particular user preferences. Characteristics of these pre-set listening programs are typically determined during an initial fitting session in a dispenser's office and programmed into the aid by transmitting or activating corresponding algorithms and algorithm parameters to a non-volatile memory area of the hearing prosthesis.

35

2

The hearing aid user is subsequently left with the task of manually selecting, typically by actuating a push-button on the hearing aid or a program button on a remote control, between the pre-set listening programs in accordance with the current listening or sound environment. Accordingly, when attending and leaving the multitude of sound

5   environments in his/hers daily whereabouts, the hearing aid user may have to devote his attention to the delivered sound quality and continuously search for the best program setting in terms of comfortable sound quality and/or the best speech intelligibility.

It would therefore be highly desirable to provide a hearing prosthesis such as a hearing

10   aid or cochlea implant device that was capable of automatically classifying the user's current listening environment so as to belong to one of a number of typical everyday listening environments. Thereafter, classification results could be utilised in the hearing prosthesis to adjust the algorithm parameters of the current listening program, or to switch to another more suitable pre-set listening program, to maintain optimum sound quality

15   and/or speech intelligibility for the individual hearing aid user.

In the past there have been made attempts to adapt signal processing characteristics of a hearing aid to the type of listening environment that the user is situated in. US 5,687,241 discloses a multi-channel DSP based hearing instrument that utilises continuous

20   determination or calculation of one or several percentile value of input signal amplitude distributions to discriminate between speech and noise input signals in the listening environment. Gain values in the frequency channels are subsequently altered in response to the detected levels of speech and noise. However, it is often desirable to discriminate between subtle characteristics of the input signal of the hearing aid not just between

25   speech and noise. As an example, it may be desirable to switch between an omni-directional and a directional microphone listening program in dependence of, not just the level of background noise, but also on further signal characteristics of this background noise. In situations where the user of the hearing prosthesis communicates with another individual in the presence of the background noise, it would be beneficial if it was possible

30   to identify and classify the type of background noise. Omni-directional operation could be selected in the event that the noise being traffic noise to allow the user to clearly hear approaching traffic independent of its direction of arrival. If, on the other hand, the background noise was classified as being babble-noise, the directional listening program could be selected to allow the user to obtain a reproduced signal with improved signal to

35   noise ratio during a communication with the other individual.

Such a detailed characterisation of an input signal from a listening environment may be obtained by applying Hidden Markov Models for analysis and classification of the input signal. Hidden Markov Models are capable of modelling stochastic input signals in terms

5   of both short and long time temporal variations rather than just being restricted to modelling long term amplitude distribution statistics or average power. Hidden Markov Models are well known in the field of speech recognition as a tool for modelling statistical properties of stochastic speech signals. The article "A Tutorial on Hidden Markov Models and Selected Applications in Speech Recognition", published in Proceedings of the IEEE,

10   VOL 77, No.2, February 1989 contains a comprehensive description of the application of Hidden Markov Models to problems in speech recognition.

The present applicants have, however, for the first time applied Hidden Markov Models to a task of classifying the listening environment of a hearing prosthesis to provide automatic

15   adjustment of one or several parameter(s) of a predetermined signal processing algorithm executed in processing means of the hearing prosthesis in dependence of these classification results.

SUMMARY OF THE INVENTION

20

One object of the invention is to provide a hearing prosthesis that automatically adjusts itself to a surrounding listening environment by controlling one or several algorithm parameters of a predetermined signal processing algorithm to allow a user to automatically obtain intelligible and comfortable amplified sound in variety of different

25   listening environments.

It is another object of the invention provide a hearing prosthesis that continuously and automatically classifies an input signal as belonging to one of several everyday listening environments and indicates the classification results to processing means to allow the

30   latter to perform the above-mentioned control of the algorithm parameters.

35

DESCRIPTION OF THE INVENTION

A first aspect of the invention relates to a hearing prosthesis comprising a microphone adapted to generate an input signal in response to receiving an acoustic signal from a

5   listening environment,

an output transducer for converting a processed output signal into an electrical or an acoustic output signal,

10 processing means adapted to process the input signal in accordance with a predetermined signal processing algorithm and related algorithm parameters to generate the processed output signal,

a memory area storing values of the related algorithm parameters for the predetermined

15 processing algorithm,

the processing means being further adapted to:

segment the input signal into consecutive signal frames of time duration, T_{frame} , and

20 generate respective feature vectors, $O(t)$, representing predetermined signal features of the consecutive signal frames,

process the feature vectors with at least one Hidden Markov Model,
$\lambda^{source} = \{A^{source}, b(O(t)), \alpha_0^{source}\}$, associated with a predetermined sound source to

25 determine an element value(s) of a classification vector indicating a probability of the predetermined sound source being active in the listening environment,

control one or several values of the related algorithm parameters in dependence of element value(s) of the classification vector. Thereby, characteristics of the predetermined

30 signal processing algorithm are adapted to the current listening environment. The at least one Hidden Markov Model (HMM) comprising:

A^{source} = A state transition probability matrix;

$b(O(t)) = $ Probability function for the input observation $O(t)$ for each state of the at least one Hidden Markov Model;

$\alpha_0^{source} = $ An initial state probability distribution vector.

5   The hearing prosthesis may be a hearing instrument or aid such as a Behind The Ear
    (BTE), an In The Ear (ITE) or Completely In the Canal (CIC) hearing aid. The input signal
    generated by the microphone may be an analogue signal or a digital signal in a multi-bit
    format or in single bit format generated by a microphone amplifier/buffer or an integrated
    analogue-to-digital converter, respectively. Preferably, the input signal to the processing
10 means is provided as a digital input signal. Therefore, in case the microphone signal is
    provided in analogue form, it is preferably converted into a corresponding digital input
    signal by a suitable analogue-to-digital converter (A/D converter) which may be included
    in an integrated circuit of the hearing prosthesis. The microphone signal may be subjected
    to various signal processing operations such as amplification and bandwidth limiting
15 before being applied to the A/D converter and other operations afterwards such as
    decimation before the digital input signal is applied to the processing means.

    The output transducer that converts the processed output signal into an acoustic or
    electrical signal or signals may be a conventional hearing aid speaker often called a
20 "receiver" or another sound pressure transducer producing a perceivable acoustic signal
    to the user of the hearing prosthesis. The output transducer may also comprise a number
    of electrodes that may be operatively connected to the user's auditory nerve or nerves.

    In the present specification and claims the term "predetermined signal processing
25 algorithm" designates any processing algorithm, executed by the processing means of the
    hearing prosthesis, that generates the processed output signal from the input signal.
    Accordingly, the "predetermined signal processing algorithm" may comprise a plurality of
    sub-algorithms or sub-routines that each performs a particular subtask in the
    predetermined signal processing algorithm. As an example, the predetermined signal
30 processing algorithm may comprise different signal processing sub-routines such as
    frequency selective filtering, single or multi-channel compression, adaptive feedback
    cancellation, speech detection and noise reduction, etc.

    Furthermore, several distinct selections of the above-mentioned signal processing sub-
35 routines may be grouped together to form two, three or more different pre-set listening

6

programs which the user may be able to select between in accordance with his/hers preferences.

The predetermined signal processing algorithm will have one or several related algorithm
5   parameters. These algorithm parameters can usually be divided into a number of smaller parameters sets, where each such algorithm parameter set is related to a particular part of the predetermined signal processing algorithm or to particular sub-routine as explained above. These parameter sets control certain characteristics of their respective subroutines such as corner-frequencies and slopes of filters, compression thresholds and ratios of
10   compressor algorithms, adaptation rates and probe signal characteristics of adaptive feedback cancellation algorithms, etc.

Values of the algorithm parameters are preferably intermediately stored in a volatile data memory area of the processing means such as a data RAM area during execution of the
15   predetermined signal processing algorithm. Initial values of the algorithm parameters are stored in a non-volatile memory area such as an EEPROM/Flash memory area or battery backed-up RAM memory area to allow these algorithm parameters to be retained during power supply interruptions, usually caused by the user's removal or replacement of the hearing aid's battery or manipulation of an ON/OFF switch.
20

The processing means may comprise one or several processors and its/their associated memory circuitry. The processor may be constituted by a fixed point or floating point Digital Signal Processor (DSP) with a single or dual MAC architecture that performs both the calculations required in the predetermined signal processing algorithm as well a
25   number of so-called household tasks such as monitoring and reading values of external interface signals and programming ports. Alternatively, the processing means may comprise a DSP that performs number crunching, i.e. multiplication, addition, division, etc. while a commercially available, or even proprietary, microprocessor kernel handles the household tasks which mostly involve logic operations and decision making.
30

The DSP may be a software programmable type executing the predetermined signal processing algorithm in accordance with instructions stored in an associated program RAM area. A data RAM area integrated with the processing means may store initial and intermediate values of the related algorithm parameters and other data variables during
35   execution of the predetermined signal processing algorithm as well as various other

household variables. Such a software programmable DSP may be advantageous for some applications due to the possibility of rapidly implementing and testing modifications of the predetermined signal processing algorithm. Clearly, the same advantages apply to sub-routines that handle the household tasks. Alternatively, the processing means may be

5   constituted by a hard-wired DSP core so as to execute one or several fixed predetermined signal processing algorithm(s) in accordance with a fixed set of instructions from an associated logic controller. In this type of hard-wired processor architecture, the memory area storing values of the related algorithm parameters may be provided in the form of a register file or as a RAM area if the number of algorithm parameters justifies the latter

10 solution.

According to the invention, the processing means are further adapted to segment the input signal into consecutive signal frames of duration T_{frame} and generate respective feature vectors, $O(t)$, representing predetermined signal features of the consecutive

15 signal frames. The feature vectors are subsequently processed with at least one Hidden Markov Model, $\lambda^{source} = \{A^{source}, b(O(t)), \alpha_0^{source}\}$, associated with a predetermined sound source to determine element value(s) of a classification vector. This classification vector indicates a probability of the predetermined sound source being active in the current listening environment. By controlling one or several values of the algorithm parameters

20 related to the predetermined signal processing algorithm in dependence of element value(s) of the classification vector, the processing of the input signal is adapted to the listening environment in dependence of these element value(s). The consecutive signal frames may be non-overlapping or overlapping with a predetermined amount of overlap, e.g. overlapping with between 10 % - 50 % to avoid sharp discontinuities at boundaries

25 between neighbouring signal frames and/or counteract window effects of any applied window function, such as a Hanning window, at the boundaries. While the above-mentioned frame segmentation of the input signal is required for the purpose of generating the feature vectors, $O(t)$, and process these with the at least one Hidden Markov Model, the predetermined signal processing algorithm may process the input

30 signal on a sample-by-sample basis or on a frame-by-frame basis with a frame time equal to or different from T_{frame}.

The at least one Hidden Markov Model may comprise at least one discrete Hidden Markov Model, $\lambda^{source} = \{A^{source}, B^{source}, \alpha_0^{source}\}$, wherein B^{source} is an observation symbol

probability distribution matrix which serves as a discrete equivalent of the general function, $b(O(t))$, defining the probability function for the input observation $O(t)$ for each state of a Hidden Markov Model. In this discrete case, the processing means are preferably adapted to compare each of the respective feature vectors, $O(t)$, with a feature

5   vector set, often denoted a "codebook", to determine, for substantially each of the feature vectors, an associated symbol value so as to generate an observation sequence of symbol values associated with the consecutive signal frames. This process of determining symbol values from the feature vectors is commonly referred to as "vector quantization". Thereafter, the observation sequence of symbol values is processed with the at least one

10 discrete Hidden Markov Model, λ^{source}, which is associated with the predetermined sound source to determine the element value(s) of the classification vector.

According to a preferred embodiment of the invention, the processing means are adapted to process the feature vectors with a plurality of Hidden Markov Models, or process the

15 observation sequence of symbol values with a plurality of discrete Hidden Markov Models. Each of the discrete Hidden Markov Models or each of the Hidden Markov Models is preferably associated with a respective predetermined sound source to determine the element values of the classification vector. Each element value may directly represent a probability (i.e. a value between 0 and 1) of the associated predetermined sound source

20 being active in the current listening environment.

The duration of one of the signal frames, T_{frame}, is preferably selected to be within the range 1 - 100 milliseconds, such as about 5 – 10 milliseconds. Such time duration allow the applied Hidden Markov Model(s) to operate on time scales of the input signal that are

25 comparable to individual features, e.g. phonemes, of speech signals and on envelope modulations of a number of relevant acoustic noise sources.

A predetermined sound source may be any natural or synthetic sound source such as a natural speech source, a telephone speech source, a traffic noise source, multi-talker or

30 babble source, subway noise source, transient noise source or a wind noise source. A predetermined sound source may also be constituted by a mixture of a natural speech and/or traffic noise and/or or babble mixed together in a predetermined proportions to e.g. create a particular signal to noise ratio(snr) in that predetermined sound source. For example, a predetermined sound source may be speech and babble mixed in a proportion

35 that creates a particular target snr such as 5 dB or 10 dB or more preferably 20 dB. The

Hidden Markov Model associated with such a mixed speech-babble sound source will then through the classification vector be able indicate how well a current input signal or signals fit this speech-babble sound source. The processing means can consequently select appropriate signal processing parameters based on both the interfering noise type

5 and the actual signal to noise ratio.

Temporal and spectral characteristics of each of these predetermined sound sources may have been obtained based on real-life recordings of one or several representative sound sources. The temporal and spectral characteristics for each type of predetermined sound

10 source are preferably obtained by performing real-life recording of a number of such representative sound sources and concatenate these recordings in a single recording (or sound file). For speech sound sources, the present inventors have found that utilising about 10 different speakers, preferably 5 males and 5 females, will generally provide good classification results in the Hidden Markov Model associated with the speech source. The

15 mixed sound source type is preferably provided by post-processing of one or several of the real-life recordings to obtain desired specific characteristics of the mixed sound source such as a predetermined signal to noise ratio.

When the concatenated sound source recording has been formed, feature vectors,

20 preferably identical to those feature vectors that are generated by the processor means in the hearing prosthesis, are extracted from the concatenated sound source recording to form a training observation sequence for the associated continuous or discrete HMM. The duration of the training sequence depends on the type of sound source, but it has been found that a duration of about 3 - 20 minutes, such as about 4 – 6 minutes is adequate for

25 many types of sound sources including speech sound sources. Thereafter, for each predetermined sound source, the corresponding HMM is trained with the generated training observation sequence, preferably, by the Baum-Welch iterative algorithm to obtain values of, A^{source}, the state transition probability matrix, values for B^{source}, the observation symbol probability distribution matrix (for discrete HMM models) and values of

30 α_0^{source}, the initial state probability distribution vector. If the HMM is ergodic, the values of the initial state probability distribution vector are determined from the state transition probability matrix.

The feature vectors that are generated from the consecutive signal frames may represent

35 spectral properties of the signal frames, temporal properties of the signal frame or any

combination of these. The spectral properties may be expressed in the form of Discrete Fourier Transform coefficients, Linear Predictive Coding parameters, cepstrum parameters or corresponding differential cepstrum parameters.

5   If a discrete HMM or HMMs are utilised, the codebook, may have been determined by an off-line training procedure which utilised real-life sound source recordings. The number of feature vectors that constitutes the codebook may vary depending on the particular application, but for hearing aid applications, it has been found that a codebook comprising between 8 and 256 different feature vectors, such as 32 – 64 different feature vectors
10   usually will provide an adequate coverage of the complete feature space. The comparison between each of the feature vectors computed from the consecutive signal frames and the codebook provides a symbol value which may be selected by choosing an integer index belonging to that codebook entry nearest to the feature vector in question. Thus, the output of this vector quantization process may be a sequence of integer indexes
15   representing the corresponding symbol values.

To generate the codebook so as to closely resemble feature vectors that is generated in the hearing prosthesis during on-line processing of the input signal, i.e. normal use, the real life sound recordings may have been made by passing the signal through an input
20   signal path of a target hearing prosthesis. By adopting such a procedure, frequency response deviations as well as other linear and/or non-linear distortions generated by the input signal path of the target hearing prosthesis can be compensated by introducing corresponding signal characteristics into the codebook. Thus, a close resemblance between the feature vector set and on-line generated feature vectors is secured to
25   optimise recognition and classification results from the subsequent processing in the discrete Hidden Markov Model or Models. A similar advantageous effect may, naturally, be obtained by performing a pre-processing of the real-life sound recordings which is substantially similar to the processing of the input signal path of a target hearing prosthesis before extraction of the feature vector set or codebook is performed. The latter
30   solution could be implemented by applying suitable analogue and/or digital filters or filter algorithms to the input signal tailored to simulate a priori known characteristics of the input signal path in question.

While it has proven helpful to utilise so-called left-to-right Hidden Markov Models in the
35   field of speech recognition where the known temporal characteristics of words and

utterances are matched in a structure of the model, the present inventors have found it advantageous to use at least one ergodic Hidden Markov Model, and, preferably, to use ergodic Hidden Markov Models for all applied Hidden Markov Models. An ergodic Hidden Markov Model is a model in which it is possible to reach any internal state from any other

5   internal state in the model.

The number of internal model states of any particular HMM of the plurality of HMMs may depend on the particular type of predetermined sound source modelled. A relatively simple nearly constant noise source may be adequately modelled by a HMM with only a

10 few internal states while more complex sound sources such as speech or mixed speech and complex noise sources may require additional internal states. Preferably, the at least one Hidden Markov Model or each of the plurality of Hidden Markov Models comprises between 2 and 10 states, such as between 3 and 8 states. According to a preferred embodiment of the invention, four discrete HMMs are used in a proprietary DSP in a

15 hearing instrument, where each of the four HMMs has 4 internal states. The four internal states are associated with four common predetermined sound sources: speech source, traffic noise source, multi-talker or babble source, and subway noise source, respectively. A codebook with 64 feature vectors, each consisting of 12 delta-cepstrum parameters, is utilised to provide vector quantisation of the feature vectors derived from the input signal

20 of the hearing aid. However, the feature vector set may comprise between 8 and 256 different feature vectors, such as 32 – 64 different feature vectors without taking up excessive amount of memory in the hearing aid DSP.

The processing means may be adapted to process the input signal in accordance with at

25 least two different predetermined signal processing algorithms, each being associated with a set of algorithm parameters, where the processing means are further adapted to control a transition between the at least two predetermined signal processing algorithms in dependence of the element value(s) of the classification vector. This embodiment of the invention is particularly useful where the hearing prosthesis is equipped with two closely

30 spaced microphones, such as a pair of omni-directional microphones, generating a pair of input signals which can be utilised to provide a directional signal mode by well-known delay-subtract techniques and a non-directional signal mode, e.g. by processing only one of the input signals. The processing means may control a transition between the directional and the omni-directional mode in a smooth manner through a range of

35 intermediate values of the algorithm parameters so that the directionality of the processed

12

output signal gradually increases/decreases. The user will thus not experience abrupt changes in the reproduced sound but rather e.g. a smooth improvement in signal to noise ratio.

5   To control such transitions between two predetermined signal processing algorithms, the processing means may further comprise a decision controller adapted to monitor the elements of the classification vector and control transitions between the plurality of Hidden Markov Models in accordance with a predetermined set of rules. The decision controller may advantageously operate as an intermediate layer between the classification vector

10   provided by the HMMs and the one or plurality of related algorithm parameters. By monitoring element values of the classification vector and controlling the value(s) of the related algorithm parameter(s) in accordance with rules about maximum and minimum switching times between HMMs and, optionally, interpolation characteristics between the algorithm parameters, the inherent time scales that the HMMs operates on can be

15   smoothed. If for example, a number of discrete HMMs operates on consecutive symbol values that each represent a time frame of about 6 ms, it may be advantageous to lowpass filter or smooth rapid transitions between a speech HMM and babble noise HMM that are caused by pauses between words in conversational speech in a "cocktail party" type listening environment. Instead of performing an instantaneous switch between the

20   two predetermined signal processing algorithms for every model transition, suitable time constants and hysteresis could be provided in the decision controller.

According to a preferred embodiment of the invention, the decision controller comprises a second set of HMMs operating on a substantially longer time scale of the input signal than

25   the HMM(s) in a first layer. Thereby, the processing means are adapted to process the observation sequence of symbol values or the feature vectors with a first set of Hidden Markov Models operating at a first time scale and associated with a first set of predetermined sound sources to determine element values of a first classification vector. Subsequently, the first classification vector is processed with the second set of Hidden

30   Markov Models operating at a second time scale and associated with a second set of predetermined sound sources to determine element values of a second classification vector.

The first time scale is preferably selected within the range 10 – 100 ms to allow the first

35   set of HMMs to operate on individual signal features of common speech and noise signals

and the second time scale is preferably selected within the range 1 – 60 seconds such as about 10 or 20 seconds to allow the second set of HMMs to operate on changes between different listening environments. Environmental changes usually occur when the user of the hearing prosthesis moves between differing listening environments, e.g. a subway

5   station and the interior of a train or a domestic environment, or between an interior of a car and standing near a street with bypassing traffic etc.

A second aspect of the invention relates to a method of generating automatic classification of input signals in a hearing prosthesis, the method comprising the steps of:

10

receiving an acoustic signal from a listening environment by a microphone of the hearing prosthesis to generate an input signal,

processing the input signal in accordance with a predetermined signal processing

15   algorithm and a plurality of related algorithm parameters stored in a memory area to generate a processed output signal,

segmenting the input signal into consecutive signal frames of time duration, T_{frame},

20   generating respective feature vectors, $O(t)$, representing predetermined signal features of the consecutive signal frames,

processing the feature vectors with at least one Hidden Markov Model,
$\lambda^{source} = \{A^{source}, b(O(t)), \alpha_0^{source}\}$, associated with a predetermined sound source to

25   determine element value(s) of a classification vector indicating a probability of the predetermined sound source being active in the listening environment,

controlling one or several values of the related algorithm parameters in dependence of element value(s) of the classification vector to control characteristics of the processed

30   output signal,

converting the processed output signal into an electrical or an acoustic output signal or signals by one or several output transducers,

thereby adapting characteristics of the predetermined signal processing algorithm to the current listening environment; wherein

A^{source} = A state transition probability matrix;

5   $b(O(t))$ = Probability function for the observation $O(t)$ for each state of the at least one Hidden Markov Model;

α_0^{source} = An initial state probability distribution vector.

The feature vectors may be subjected to a vector quantisation process by comparing each

10 of the respective feature vectors, $O(t)$, with a feature vector set or codebook, and determine, for substantially each feature vector, an associated symbol value so as to generate an observation sequence of symbol values associated with the consecutive signal frames. By processing the observation sequence of symbol values with at least one discrete Hidden Markov Model, $\lambda^{source} = \{A^{source}, B^{source}, \alpha_0^{source}\}$, associated with the

15 predetermined sound source, the element value or values of the classification vector may be determined; wherein

B^{source} = An observation symbol probability distribution matrix.

20 For hearing aid applications, it has been found useful to utilise at least a few HMMs in order to recognise at least a few corresponding and common listening environments so that the method may comprise processing the feature vectors with a plurality of Hidden Markov Models, or process the observation sequence of symbol values vectors with a plurality of discrete Hidden Markov Models. According to this embodiment of the

25 invention, each of the discrete Hidden Markov Models or the Hidden Markov Models is associated with a respective predetermined sound source to determine the element values of the classification vector, each element value indicating a probability of the respective predetermined sound source being active in the current listening environment.

30 According to a third aspect of the invention, a set of HMMs are utilised to recognise respective isolated words to provide the hearing prosthises with a capability of identifying a small set of voice commands which the user may utilise to control one or several functions of the hearing aid by his/hers voice. For this word recognition feature, discrete left-right HMMs are preferably utilised rather than the ergodic HMMs that it was preferred

15

to applly to the task of providing automatic listening enviroment classification. Since a left-right HMM is a special case of an ergodic HMM, the HMM structure that is used for the above-described ergodic HMMs may be at least partly re-used for the left-right HMMs. This has the advantage that DSP memory and other hardware resources may be shared

5   in a hearing prosthesis that provides both automatic listening enviroment classification and word recognition. Preferably, a number of isolated word HMMs, such as 2 - 8 HMMs, is stored in the hearing prosthesis to allow the processing means to recognise a corresponding number of distinct words. The output from each of the isolated word HMMs is a probability for a modelled word being spoken. Each of the isolated word HMMs must

10   be trained on the particular word or command it must recognise during on-line processing of the input signal. The training could be performed by applying a concatenated sound source recording including the particular word or command spoken by a number of different individuals to the associated HMM. Alternatively, the training of the isolated word HMMs could be performed during a fitting session where the words or commands

15   modelled were spoken by the user himself to provide a personalised recognition function in the user's hearing prosthesis.

BRIEF DESCRIPTION OF THE DRAWINGS

20   A preferred embodiment of a software programmable DSP based hearing aid according to the invention is described in the following with reference to the drawings, wherein

Fig. 1 is a simplified block diagram of three-chip DSP based hearing aid utilising Hidden Markov Models for input signal classification according to the invention,

25

Fig. 2 is a signal flow diagram of a predetermined signal processing algorithm executed on the three-chip DSP based hearing aid shown in Fig. 1,

Fig. 3 is signal flow diagram illustrating a listening environment classification process,

30

Fig. 4 is a state diagram for the environment Hidden Markov Model shown in Fig. 3 as block 550.

35

16

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

In the following, a specific embodiment of a three chip-set DSP based hearing aid according to the invention is described and discussed in greater detail. The present
5 description discusses in detail only an operation of the signal processing part of a DSP-core or kernel with associated memory circuits. An overall circuit topology that may form basis of the DSP hearing aid is well known to the skilled person and is, accordingly, reviewed in very general terms only.

10 In the simplified block diagram of Fig. 1, a conventional hearing aid microphone 105 receives an acoustic signal from a surrounding listening environment. The microphone 105 provides an analogue input signal on terminal MIC1IN of a proprietary A/D integrated circuit 102. The analogue input signal is amplified in a microphone preamplifier 106 and applied to an input of a first A/D converter of a dual A/D converter circuit 110 comprising
15 two synchronously operating converters of the sigma-delta type. A serial digital data stream or signal is generated in a serial interface circuit 111 and transmitted from terminal A/DDAT of the proprietary A/D integrated circuit 102 to a proprietary Digital Signal Processor circuit 2 (DSP circuit). The DSP circuit 2 comprises an A/D decimator 13 which is adapted to receive the serial digital data stream and convert it into corresponding 16 bit
20 audio samples at a lower sampling rate for further processing in a DSP core 5. The DSP core 5 has an associated program Random Read Memory (program RAM) 6, data RAM 7 and Read Only Memory (ROM) 8. The signal processing of the DSP core 5, which is described below with reference to the signal flow diagram in Fig. 2 is controlled by program instructions read from the program RAM 6.
25

A serial bi-directional 2-wire programming interface 300 allows a host programming system (not shown) to communicate with the DSP circuit 2, over a serial interface circuit 12, and a commercially available EEPROM 202 to perform up/downloading of signal processing algorithms and/or associated algorithm parameter values.
30

A digital output signal generated by the DSP-core 5 from the analogue input signal is transmitted to a Pulse Width Modulator circuit 14 that converts received output samples to a pulse width modulated (PWM) and noise-shaped processed output signal. The processed output signal is applied to two terminals of hearing aid receiver 10 which, by its
35 inherent low-pass filter characteristic converts the processed output signal to an

corresponding acoustic audio signal. An internal clock generator and amplifier 20 receives a master clock signal from an LC oscillator tank circuit formed by L1 and C5 that in co-operation with an internal master clock circuit 112 of the A/D circuit 102 forms a master clock for both the DSP circuit and the A/D circuit 102. The DSP-core 5 may be directly
5   clocked by the master clock signal or from a divided clock signal. The DSP-core 5 is preferably clocked with a frequency of about 2 - 4 MHz.

Fig. 2 illustrates a relatively simple application of discrete Hidden Markov Models to control algorithm parameter values of a predetermined signal processing algorithm of the
10 DSP based hearing aid shown in Fig. 1. The discrete Hidden Markov Models are used in the hearing aid or instrument to provide automatic classification of three different listening environments, speech in traffic noise, speech in babble noise, and clean speech as illustrated in Fig. 4. In the present embodiment of the invention, each listening environment is connected with a particular pre-set frequency response implemented by
15 FIR-filter block 450 that receives its filter parameter values from a filter choice controller 430. Operations of both the FIR-filter block 450 and the filter choice controller 430 are preferably performed by respective sub-routines executed on the DSP core 5. Switching between different FIR-filter parameter values is automatically performed when the user of the hearing aid is moving between different listening environments which is detected by
20 an listening environmental classification algorithm 420, comprising two sets of discrete HMMs operating at differing time scales as will be explained with reference to Figs. 3 and 4. Another possibility is to let the listening environmental classifier 420 supplement an additional multi-channel AGC algorithm or system, which could be inserted between the input (IN) and the FIR-filter block 450, calculating, or determining by table lookup, gain
25 values for consecutive signal frames of the input signal.

The user may have a favorite frequency response/gain for each of the listening environments that can be recognized/classified by its corresponding discrete Hidden Markov Model. These favorite frequency responses/gains may be found by applying a
30 number of standard prescription methods, such as NAL, POGO etc, combined with individual interactive fine-tuning methods.

In Fig. 2, a raw input signal at node IN, provided by the output of the A/D decimator 13 in Fig. 1, is segmented to form consecutive signal frames, each with a duration of 6 ms. The input signal is preferably sampled at 16 kHz at this node so that each frame consists of 96
35 audio signal samples. The signal processing is performed along of two different paths, in

a classification path through signal blocks 410, 420, 440 and 430, and a predetermined signal processing path through block 450. Pre-computed impulse responses of the respective FIR filters are stored in the data RAM during program execution. The choice of parameter values or coefficients for the FIR filter block 450 is performed by the Filter

5 Choice Block 430 based on the element values of the classification vector, and, optionally, on data from the Spectrum Estimation Block 440.

Fig. 3 shows a signal flow diagram of a preferred implementation of the classification block 420 of Fig. 2. A vector quantizer (VQ) block 510 precedes the dual layer HMM

10 architecture, where blocks 520, 521, 522 is a first HMM layer and block 550 is a second HMM layer. The system therefore consists of four stages: a feature extraction layer 500, a sound feature classification layer 510, the first HMM layer in the form of a sound source classification layer 520-522 and a second HMM layer in the form of a listening environment classification layer 550. The sound source classification layer uses three or

15 five Hidden Markov Models and a single HMM is used in the listening environment classification layer 550.

The structure of the classification block 420 makes it possible to have different switching times between different listening environments, e.g. slow switching between traffic and

20 babble and fast switching between traffic and speech.

The output signal OUT1 of classification block 420 is a classification vector, in which each element contains the probability that a particular sound source of the three pre-determined sound sources 520, 521, 522 modelled by their respective discrete HMMs is

25 active. The output signal OUT2 is another classification vector, in which each element contains the probability that a particular listening environment is active.

The processing of the input signal in the above-mentioned classification path is described in the following with reference to the implementation in Fig. 3:

30

The input at time t is a block $\mathbf{x}(t)$, of size B, with input signal samples.

$$\mathbf{x}(t) = [x_1(t) \quad x_2(t) \quad \cdots \quad x_B(t)]^T$$

$\mathbf{x}(t)$ is multiplied with a window, w_n, and the Discrete Fourier Transform, DFT, is calculated.

$$X_k(t) = \frac{1}{B} \sum_{n=0}^{B-1} w_n x_n(t) e^{-j\frac{2\pi kn}{B}} \qquad k = 0..B/2-1$$

A feature vector is extracted or computed for every new frame. It is presently preferred to use 12 cepstrum parameters for each feature vector:

$$c_k(t) = \sum_{n=0}^{B/2-1} \cos\left(\frac{2\pi kn}{B}\right) \log|X_n(t)| \qquad k = 0..11$$

5   The output at time t is a feature column vector, $\mathbf{f}(t)$, with continuous valued elements.

$$\mathbf{f}(t) = [c_0(t) \quad c_1(t) \quad \cdots \quad c_{11}(t)]^T$$

The corresponding differential cepstrum parameter vector (often called delta-cepstrum), is calculated as $\Delta\mathbf{f}(t) = \sum_{i=0}^{K-1} h_i \mathbf{f}(t-i)$, where h_i is determined such that $\Delta\mathbf{f}(t)$ approximates

10 the first differential of $\mathbf{f}(t)$ with respect to the time t. A preferred length of the filter defined by coefficients h_i is $K=8$.

The delta-cepstrum coefficients are sent to the vector quantizer in the classification block 420. Other features, e.g. time domain features or other frequency-based features, may be
15 added.

The classification block 420 comprises three layers operating at different time scales: (1) a Short-term Layer (Sound Feature Classification) 510, operating instantly on each signal frame, (2) a Medium-term Layer (Sound Source Classification) 501-522, operating in the
20 time-scale of envelope modulations within predetermined sound sources modelled by the four HMMs, and (3) a Long-term Layer (Listening Environment Classification) 550, operating in a slower time-scale corresponding to shifts between different sound sources in a given listening environment or the shift between different listening environments. This is further illustrated in Fig. 4.
25
The predetermined sound sources modelled by the present embodiment of the invention are *traffic noise* source, *babble noise* source, and a *clean speech* source but could also comprise mixed sound sources that each may contain a predetermined proportion of e.g. speech and babble or speech and traffic noise as illustrated in Fig. 4. The final output of
30 the classifier is a listening environment probability vector, OUT1, continuously indicating a current probability estimate for each listening environment, and a sound source probability

vector, OUT2, indicating the estimated probability for each sound source. A listening environment may consist of one of the predetermined sound sources 520-522 or a combination of two or more of the predetermined sound sources as illustrated in more detail in the description of Fig. 4.

5

The input to the vector quantizer block 510 is a feature vector with continuously valued elements. The vector quantizer has M, e.g 32, codewords in the codebook $\begin{bmatrix} \mathbf{c}^1 & \cdots & \mathbf{c}^M \end{bmatrix}$ approximating the complete feature space. The feature vector is quantized to closest codeword in the codebook and the index $o(t)$, an integer index between 1 and M, to the

10 closest codeword is generated as output.

$$O(t) = \arg\min_{i=1..M} \left\| \Delta \mathbf{f}(t) - \mathbf{c}^i \right\|^2$$

The VQ is trained off-line with the Generalized Lloyd algorithm (Linde, 1980). Training material consisted of real-life recordings of sounds-source samples. These recordings have been made through the input signal path, shown on Fig. 1, of the DSP based

15 hearing instrument.

Each of the three sound sources is modelled by a respective discrete HMM. Each HMM consists of a state transition probability matrix, A^{source}, an observation symbol probability distribution matrix, B^{source}, and an initial state probability distribution column vector,

20 α_0^{source}. A compact notation for a HMM is, $\lambda^{source} = \left\{ A^{source}, B^{source}, \alpha_0^{source} \right\}$. Each sound source model has $N=4$ internal states and observes the stream of VQ symbol values or centroid indices $\begin{bmatrix} O(1) & \cdots & O(t) \end{bmatrix}$ $O_t \in [1, M]$. The current state at time t is modelled as a stochastic variable $Q^{source}(t) \in \{1,...,N\}$.

25 The purpose of the medium-term layer is to estimate how well each source model can explain the current input observation $O(t)$. The output is a column vector $\mathbf{u}(t)$ with elements indicating the conditional probabilities

$$\phi^{source}(t) = prob\left(O(t) \big| O(t-1),...,O(1), \lambda^{source} \right) \text{ for each source.}$$

30 The standard forward algorithm (Rabiner, 1989) is used to update recursively the state probability column vector $\mathbf{p}^{source}(t)$. The elements $p_i^{source}(t)$ of this vector indicate the

conditional probability that the sound source is in state i,

$$p_i^{source}(t) = prob\left(Q^{source}(t) = i, o(t)\middle| o(t-1), ..., o(1), \lambda^{source}\right).$$

The recursive update equations are:

5   $$\mathbf{p}^{source}(t) = \left(\left(\mathbf{A}^{source}\right)^T \hat{\mathbf{p}}^{source}(t-1)\right) \circ \mathbf{b}^{source}(o(t))$$

$$\phi^{source}(t) = prob\left(o(t)\middle| o(t-1), ..., o(1), \lambda^{source}\right) = \sum_{i=1}^{N} p_i^{source}(t)$$

$$\hat{p}_i^{source}(t) = p_i^{source}(t) / \sum_{i=1}^{N} p_i^{source}(t)$$

wherein operator $\circ$ defines element-wise multiplication.

10

Fig. 4 shows in more detail a slightly modified version of dual layer HMM structure illustrated in Fig. 3 so that the first layer of HMMs 520-522 comprises two additional HMMs, a fourth HMM modelling a predetermined sound source of "speech in traffic noise" and fifth HMM modelling a predetermined sound source "speech in cafeteria babble".

15

Signal OUT1 of the final HMM layer 550 estimates current probabilities for each of the modelled listening environment by observing the stream of sound source probability vectors from the previous layer of HMMs. The listening environment is represented by a discrete stochastic variable $E(t) \in \{1...3\}$, with outcomes coded as 1 for "speech in traffic

20   noise", 2 for "speech in cafeteria babble", 3 for "clean speech". Thus, the output probability vector or classification vector has three elements, one for each of these environments. The final HMM layer 550 contains five states representing Traffic noise, Speech (in traffic, "Speech/T"), Babble, Speech (in babble, "Speech/B"), and Clean Speech ("Speech/C"). Transitions between listening environments, indicated by dashed

25   arrows, have low probability, and transitions between states within one listening environment, shown by solid arrows, have relatively high probabilities.

The final HMM layer 550 consists of a Hidden Markov Model with five states and transition probability matrix $\mathbf{A}^{env}$ (Fig. 4). The current state in the environment hidden Markov

30   model is modelled as a discrete stochastic variable $S(t) \in \{1...5\}$, with outcomes coded as 1 for "traffic", 2 for speech (in traffic noise, "speech/T"), 3 for "babble", 4 for speech (in babble, "speech/B"), and 5 for clean speech "speech/C".

The *speech in traffic noise* listening environment, $E(t) = 1$, has two states $S(t) = 1$ and $S(t) = 2$. The *speech in cafeteria babble* listening situation, $E(t) = 2$, has two states $S(t) = 3$ and $S(t) = 4$. The clean speech listening environment, $E(t) = 3$, has only one

5   state, $S(t) = 5$. The transition probabilities between listening environments are relatively low and the transition probabilities between states within a listening environment are high.

The environment Hidden Markov Model 550 observes the stream of vectors $[\mathbf{u}(1) \quad \dots \quad \mathbf{u}(t)]$, where

10    $\mathbf{u}(t) = \left[\phi^{traffic}(t) \quad \phi^{speech}(t) \quad \phi^{babble}(t) \quad \phi^{speech}(t) \quad \phi^{speech}(t)\right]^T$ containing the estimated observation probabilities for each state. The probability for being in a state given the current and all previous observations and given the environment Hidden Markov Model, $\hat{p}_i^{env} = prob\left(S(t) = i \,\middle|\, \mathbf{u}(t), \dots, \mathbf{u}(1), \mathbf{A}^{env}\right)$, is calculated with the forward algorithm (Rabiner, 1989),

15    $\mathbf{p}^{env}(t) = \left(\left(\mathbf{A}^{env}\right)^T \hat{\mathbf{p}}^{env}(t-1)\right) \circ \mathbf{u}(t)$, with elements

$p_i^{env} = prob\left(S(t) = i, \mathbf{u}(t) \,\middle|\, \mathbf{u}(t-1), \dots, \mathbf{u}(1), \mathbf{A}^{env}\right)$, and finally, with normalization,

$\hat{\mathbf{p}}^{env}(t) = \mathbf{p}^{env}(t) / \sum p_i^{env}(t)$.

The probability for each listening environment, $\mathbf{p}^E(t)$, given all previous observations and given the environment hidden Markov model, can now be calculated as

20    $\mathbf{p}^E(t) = \begin{pmatrix} 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 \end{pmatrix} \hat{\mathbf{p}}^{env}(t)$.

As previously mentioned, the spectrum estimation block 440 of Fig. 2 is optional but may be utilized to estimate an average frequency spectrum which adapts slowly to the current listening environment. Another possibility is to estimate two or more slowly adapting

25   spectra for different sound sources in a given listening environment, e.g. one speech spectrum and one noise spectrum.

The source probabilities, $\phi^{source}(t)$, the environment probabilities $\mathbf{p}^E(t)$, and the current log power spectrum, $X(t)$, are used to estimate the current signal and noise log power spectra. Two low-pass filters are used in the estimation, one filter for the signal spectrum and one filter for the noise spectrum. The signal spectrum is updated if $p_1^E(t) > p_2^E(t)$ and

5 $\phi^{speech}(t) > \phi^{traffic}(t)$ or if $p_2^E(t) > p_1^E(t)$ and $\phi^{speech}(t) > \phi^{babble}(t)$. The noise spectrum is updated if $p_1^E(t) > p_2^E(t)$ and $\phi^{traffic}(t) > \phi^{speech}(t)$ or if $p_2^E(t) > p_1^E(t)$ and $\phi^{babble}(t) > \phi^{speech}(t)$.

NOTATION:

10 M Number of centroids in Vector Quantizer

N Number of States in HMM

$\lambda^{source} = \left\{ A^{source}, B^{source}, \pi^{source} \right\}$ compact notation for a discrete HMM, describing a source, with N states and M observation symbols

B Blocksize

15 $O = \begin{bmatrix} O_{-\infty} & \cdots & O_t \end{bmatrix}$ Observation sequence

$O_t \in [1, M]$ Discrete observation at time t

$\mathbf{f}(t)$ Feature vector

$\mathbf{w}$ Window of size B

$\mathbf{x}(t)$ One block of size B, at time t, of raw input samples

20 $X(t)$ The corresponding discrete complex spectrum, of size B, at time t

REFERENCES

L. R. Rabiner, A Tutorial on Hidden Markov Models and Selected Applications in Speech Recognition. Proc. IEEE, vol. 77, no. 2, February 1989

25 Linde, Y., Buzo, A., and Gray, R. M. An Algorithm for Vector Quantizer Design. IEEE Trans. Comm., COM-28:84-95, January 1980.

CLAIMS

1. A hearing prosthesis comprising:

5   a microphone adapted to generate an input signal in response to receiving an acoustic
    signal from a listening environment,

    an output transducer for converting a processed output signal into an electrical or an
    acoustic output signal,

10

    processing means adapted to process the input signal in accordance with a
    predetermined signal processing algorithm and related algorithm parameters to generate
    the processed output signal,

15 a memory area storing values of the related algorithm parameters for the predetermined
    signal processing algorithm,

    the processing means being further adapted to:

20 segment the input signal into consecutive signal frames of time duration, T_{frame} , and
    generate respective feature vectors, $O(t)$, representing predetermined signal features of
    the consecutive signal frames,

    process the feature vectors with at least one Hidden Markov Model,
25 $\lambda^{source} = \{A^{source}, b(O(t)), \alpha_0^{source}\}$, associated with a predetermined sound source to
    determine an element value or values of a classification vector indicating a probability of
    the predetermined sound source being active in the listening environment,

    control one or several values of the related algorithm parameters in dependence of
30 element value(s) of the classification vector,

    thereby adapting characteristics of the predetermined signal processing algorithm to the
    current listening environment; wherein:

A^{source} = A state transition probability matrix;

$b(O(t))$ = Probability function for an input observation $O(t)$ for each state of the at least one Hidden Markov Model;

α_0^{source} = An initial state probability distribution vector.

5

2. A hearing prosthesis according to claim 1, wherein the processing means are adapted to:

compare each of the feature vectors, $O(t)$, with a feature vector set to determine, for

10 substantially each feature vector, an associated symbol value so as to generate an observation sequence of symbol values associated with the consecutive signal frames,

process the observation sequence of symbol values with at least one discrete Hidden Markov Model, $\lambda^{source} = \{A^{source}, B^{source}, \alpha_0^{source}\}$, associated with the predetermined sound

15 source to determine the element value(s) of the classification vector; wherein:

B^{source} = An observation symbol probability distribution matrix.

3. A hearing prosthesis according to claim 1 or 2, wherein the processing means are adapted to process the feature vectors with a plurality of Hidden Markov Models, or

20 process the observation sequence of symbol values with a plurality of discrete Hidden Markov Models,

each of the discrete Hidden Markov Models or the Hidden Markov Models being associated with respective predetermined sound sources to determine the element values

25 of the classification vector, each element value indicating a probability of a respective predetermined sound source being active in the listening environment.

4. A hearing prosthesis according to any of the preceding claims, wherein the value of T_{frame} lies between 1 to 100 milliseconds, such as about 5 – 10 milliseconds.

30

5. A hearing prosthesis according to claim 3, wherein at least some of the plurality of Hidden Markov Models are adapted to model respective predetermined sound sources selected from the group consisting of: {speech, telephone speech, traffic noise, multi-talker or babble noise, subway noise, transient noise, wind noise}.

26

6. A hearing prosthesis according to any of the preceding claims, wherein each of the respective feature vectors comprises a plurality of frequency-domain parameters representing the predetermined signal features of the consecutive signal frames.

5

7. A hearing prosthesis according to any of the preceding claims, wherein each of the respective feature vectors comprises a plurality of time-domain parameters representing the predetermined signal features of the consecutive signal frames.

10   8. A hearing prosthesis according to any of the preceding claims, wherein each of the respective feature vectors comprises a plurality of cepstrum parameters or differential cepstrum parameters representing the predetermined signal features of the consecutive signal frames.

15   9. A hearing prosthesis according to any of claims 2- 8, wherein the feature vector set has been determined in an off-line training procedure which utilised real-life sound source recordings and stored in non-volatile memory locations of the hearing instrument.

10. A hearing prosthesis according to any of claim 9, wherein the real-life sound
20   recordings have been applied to an input signal path of a target hearing prosthesis or by performing an equivalent signal processing of the input signal to simulate characteristics of the input signal path.

11. A hearing prosthesis according to any of claims 2 - 10, wherein the each of the feature
25   vectors is associated with respective integer symbol values during a vector quantisation process.

12. A hearing prosthesis according to any of the preceding claims, wherein the Hidden Markov Model or Models comprise at least one ergodic Hidden Markov Model.

30
13. A hearing prosthesis according to any of the preceding claims, wherein the at least one predetermined Hidden Markov Model or each of the plurality of predetermined Hidden Markov Models comprises between 2 and 10 states.

14. A hearing prosthesis according to any of the preceding claims, wherein the at least one predetermined Hidden Markov Model or each of the plurality of predetermined Hidden Markov Models comprises between 8 and 256 discrete symbols.

5 15. A hearing prosthesis according to any of the preceding claims, wherein the processing means are adapted to process the input signal in accordance at least two different predetermined signal processing algorithms, each being associated with a respective set of algorithm parameters,

10 the processing means being further adapted to control a switching between the at least two predetermined signal processing algorithms in dependence of the determined element value(s) of the classification vector.

16. A hearing prosthesis according to claim 15, wherein the processing means are

15 adapted to process two input signals from a pair of omni-directional microphones by a first predetermined signal processing algorithm with a first set of algorithm parameters, and

adapted to process the two input signals by a second predetermined signal processing algorithm with a second set of algorithm parameters.

20

17. A hearing prosthesis according to any of claims 3 - 16, wherein the processing means further comprises a decision controller adapted to monitor the elements of the classification vector and control transitions between the plurality of Hidden Markov Models in accordance with a predetermined set of rules.

25

18. A hearing prosthesis according to any of claims 3 - 16, wherein the processing means are adapted to process the observation sequence of symbol values or the feature vectors with a first set of Hidden Markov Models operating at a first time scale and associated with a first set of predetermined sound sources to determine element values of a first

30 classification vector, and

adapted to process the first classification vector with a second set of Hidden Markov Models operating at a second time scale and associated with a second set of predetermined sound sources to determine element values of a second classification

35 vector.

19. A hearing prosthesis according to claim 18, wherein the first time scale is selected within the range 10 – 100 ms and the second time scale is selected within the range 1 – 60 seconds.

5

20. A hearing prosthesis according to any of the preceding claims, wherein the processing means comprises a software programmable processor.

21. A method of generating automatic classification of input signals in a hearing
10 prosthesis, the method comprising the steps of:

receiving an acoustic signal from a listening environment by a microphone of the hearing prosthesis to generate an input signal,

15 processing the input signal in accordance with a predetermined signal processing algorithm and related algorithm parameters to generate a processed output signal,

segmenting the input signal into consecutive signal frames of time duration, T_{frame},

20 generating respective feature vectors, $O(t)$, representing predetermined signal features of the consecutive signal frames,

processing the feature vectors with at least one Hidden Markov Model,
$\lambda^{source} = \left\{ A^{source}, b(O(t)), \alpha_0^{source} \right\}$, associated with a predetermined sound source to
25 determine element value(s) of a classification vector indicating a probability of the predetermined sound source being active in the listening environment,

controlling one or several values of the related algorithm parameters in dependence of element value(s) of the classification vector to control characteristics of the processed
30 output signal,

converting the processed output signal into an electrical or an acoustic output signal or signals by one or several output transducers,

thereby adapting characteristics of the main processing algorithm to the listening environment,

A^{source} = A state transition probability matrix;

5    $b(O(t))$ = Probability function for the observation $O(t)$ for each state of the at least one Hidden Markov Model;

α_0^{source} = An initial state probability distribution vector.

22. A method according to claim 21, comprising the steps of:

10

comparing each of the respective feature vectors, $O(t)$, with a feature vector set ,

determining, for substantially each feature vector, an associated symbol value so as to generate an observation sequence of symbol values associated with the consecutive

15   signal frames,

processing the observation sequence of symbol values with at least one discrete Hidden Markov Model, $\lambda^{source} = \{A^{source}, B^{source}, \alpha_0^{source}\}$, associated with the predetermined sound source to determine the element value or values of the classification vector,

20

B^{source} = An observation symbol probability distribution matrix.

23. A method according to claim 21 or 22, wherein the processor is adapted to process the feature vectors with a plurality of Hidden Markov Models, or process the observation

25   sequence of symbol values vectors with a plurality of discrete Hidden Markov Models,

each of the discrete Hidden Markov Models or the Hidden Markov Models being associated with respective predetermined sound sources to determine the element values of the classification vector, each element value indicating a probability of the respective

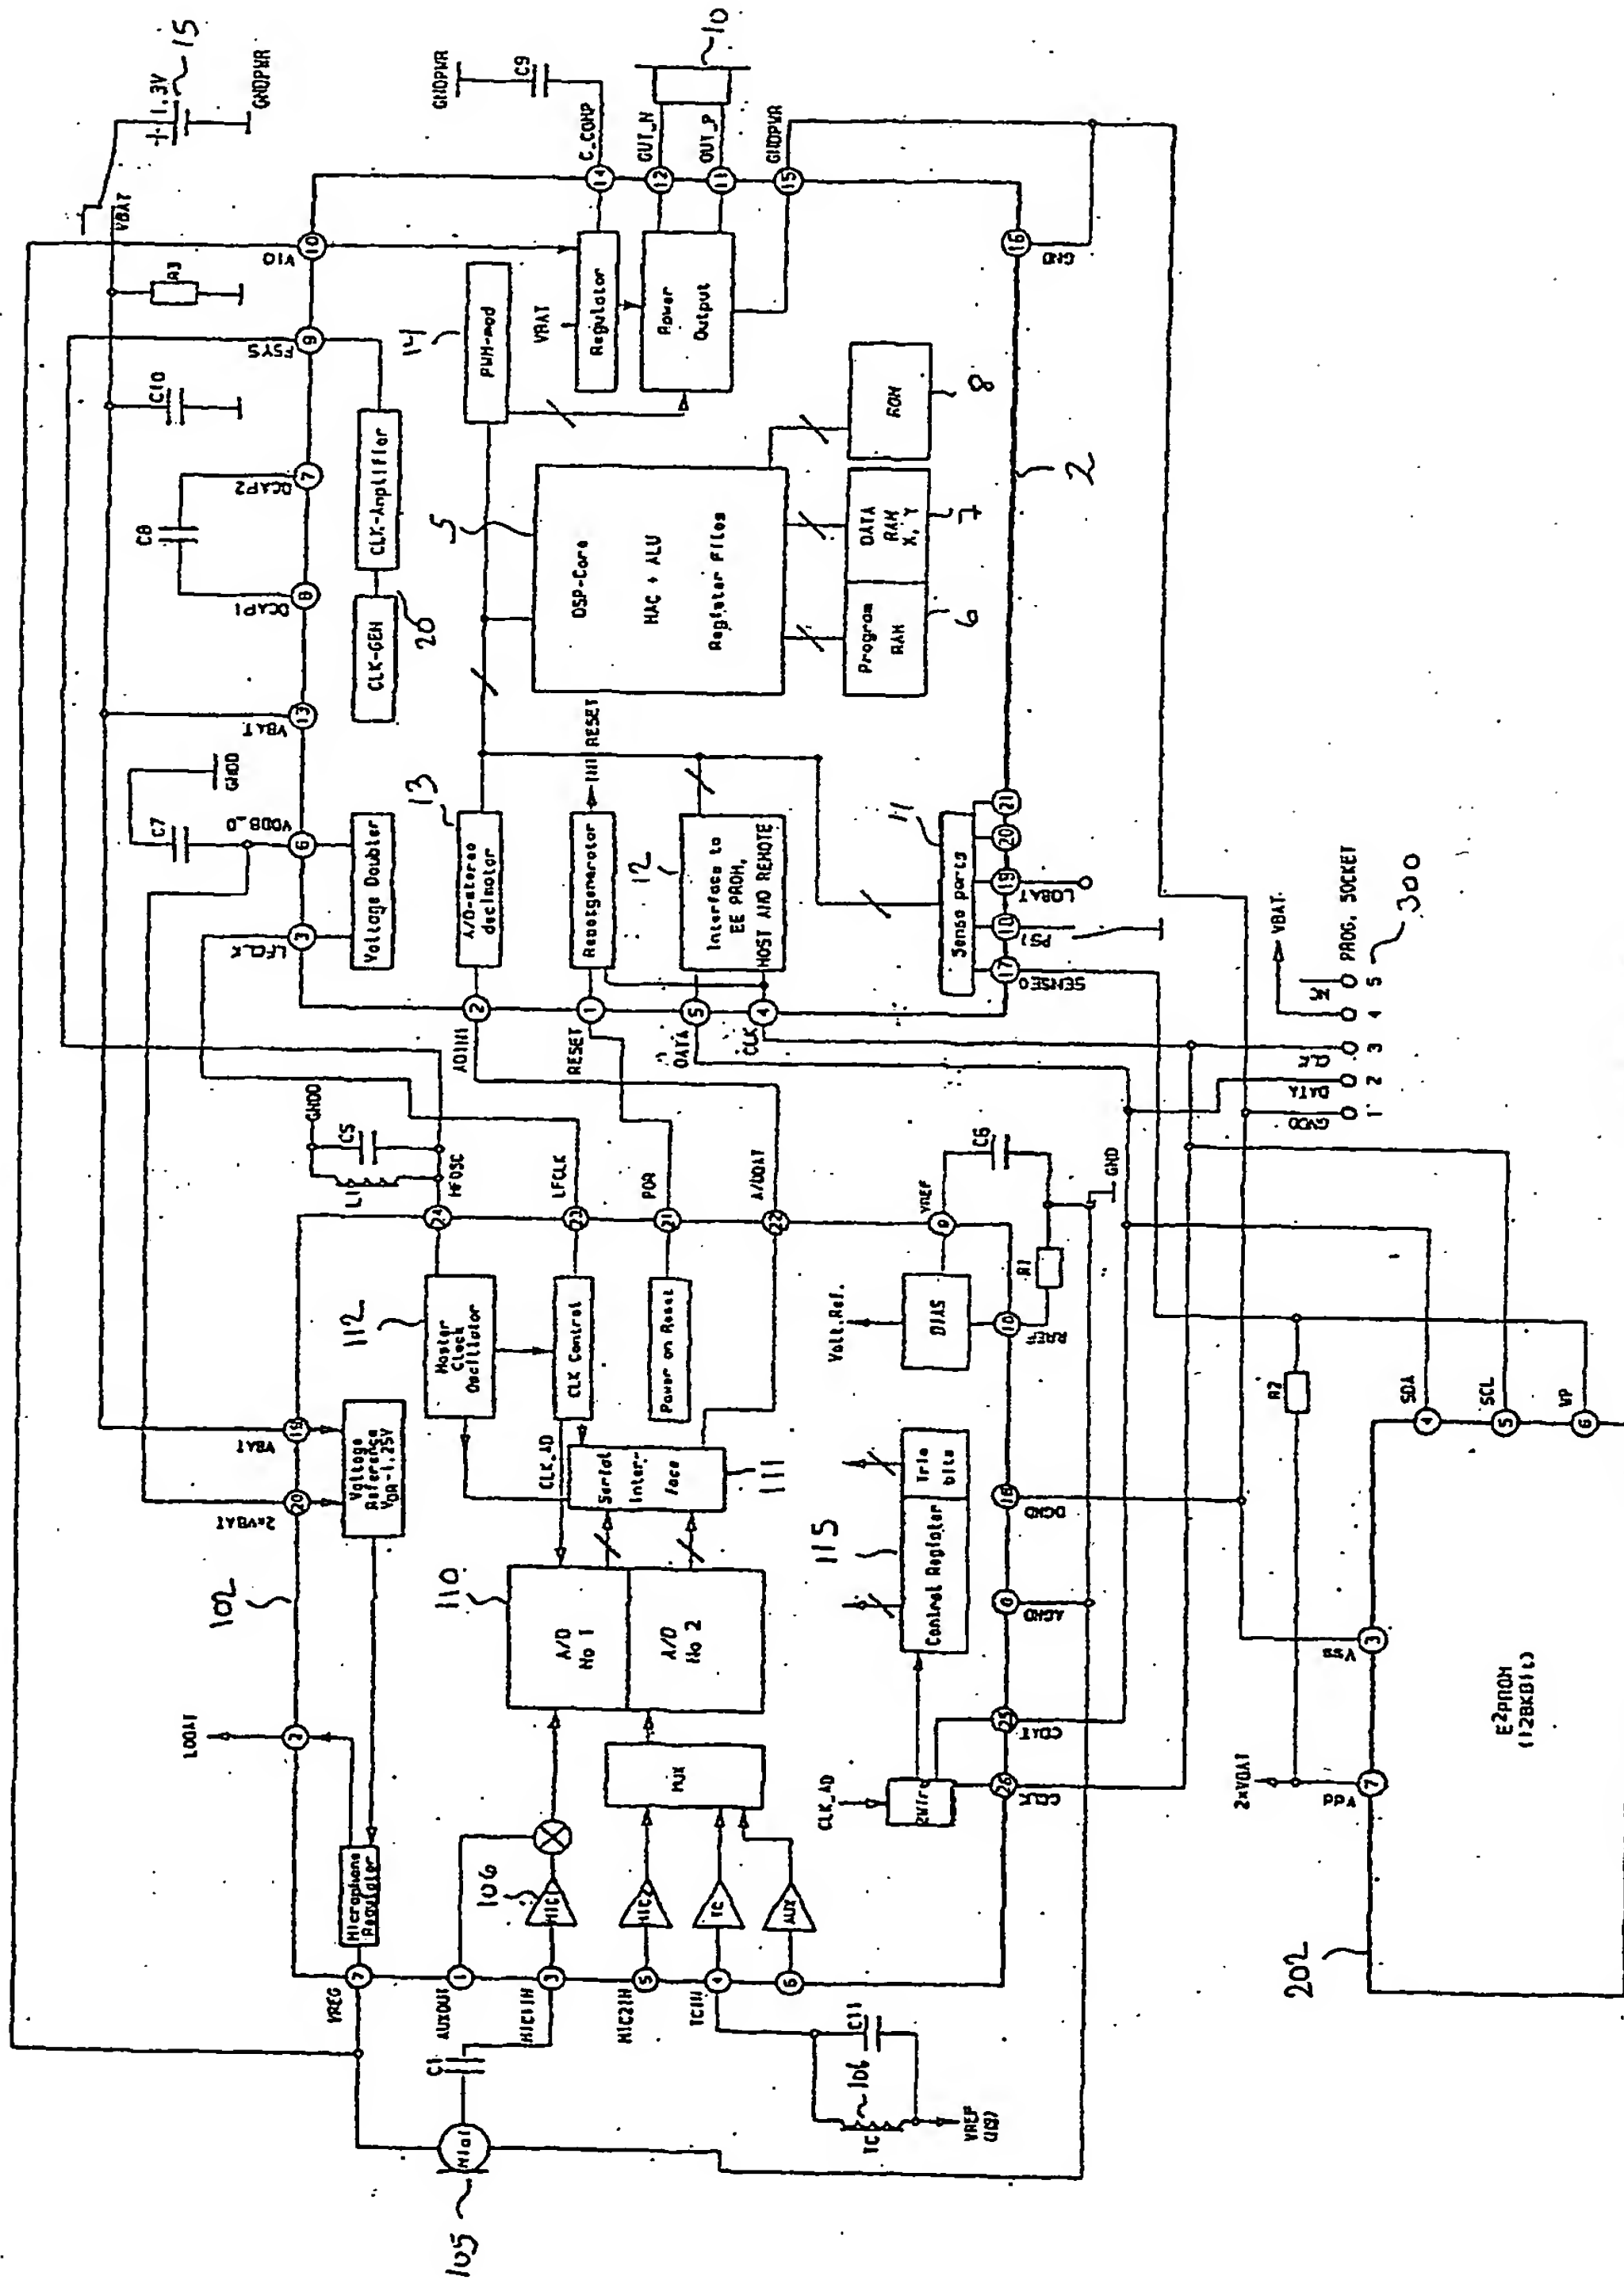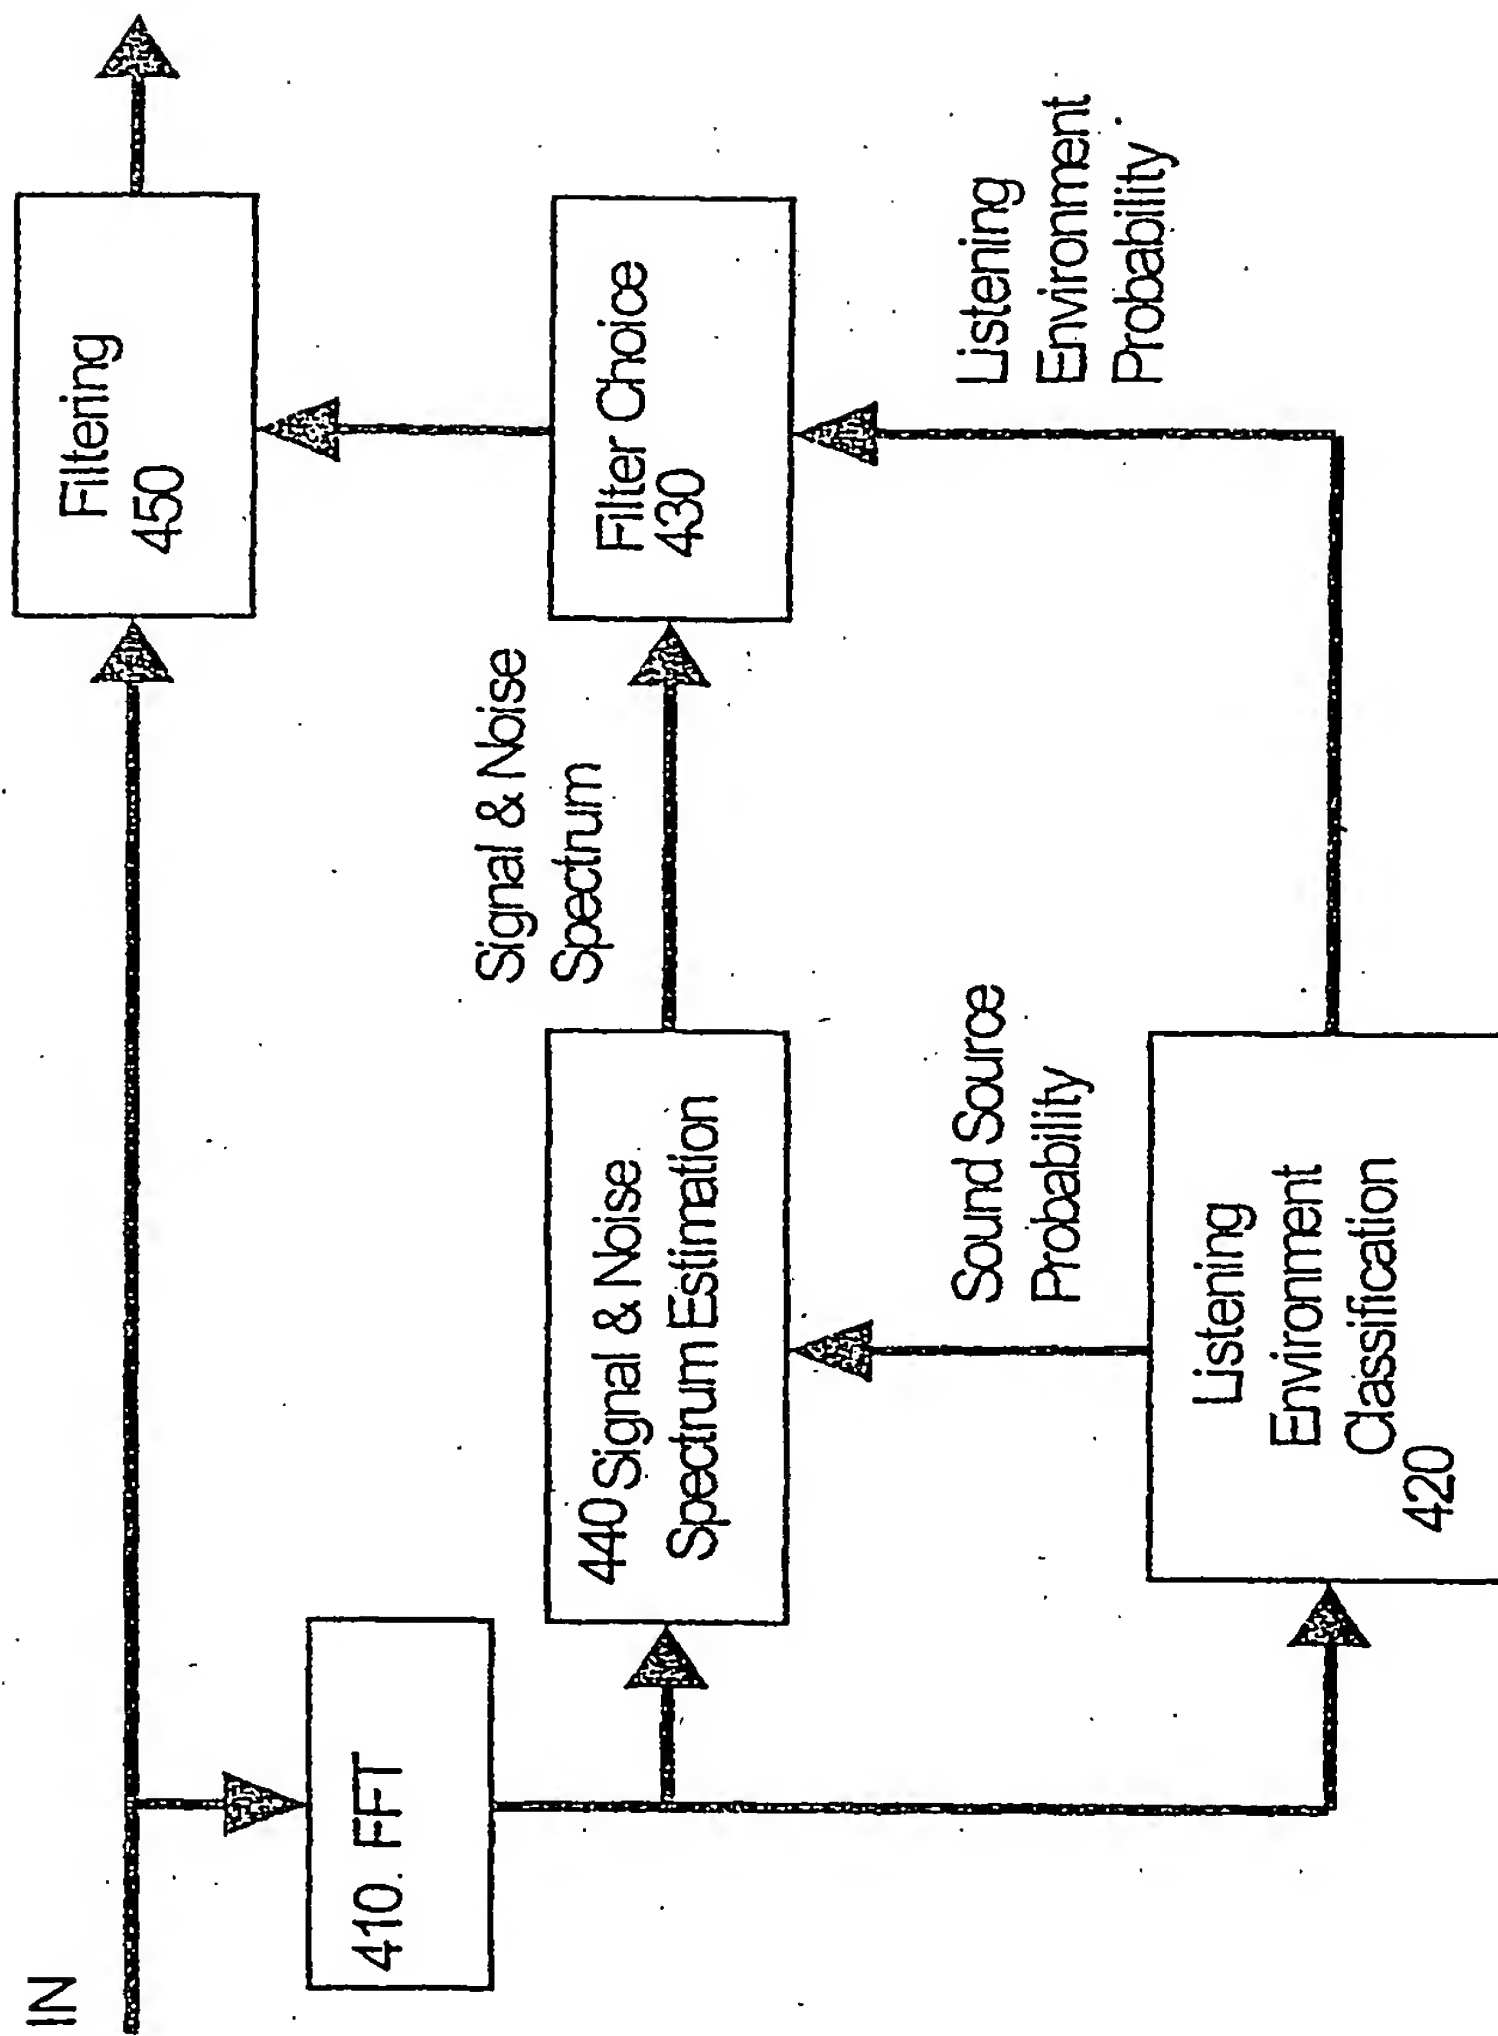30   predetermined sound source being active in the listening environment.

1/3

FIG. 1

FIG. 2
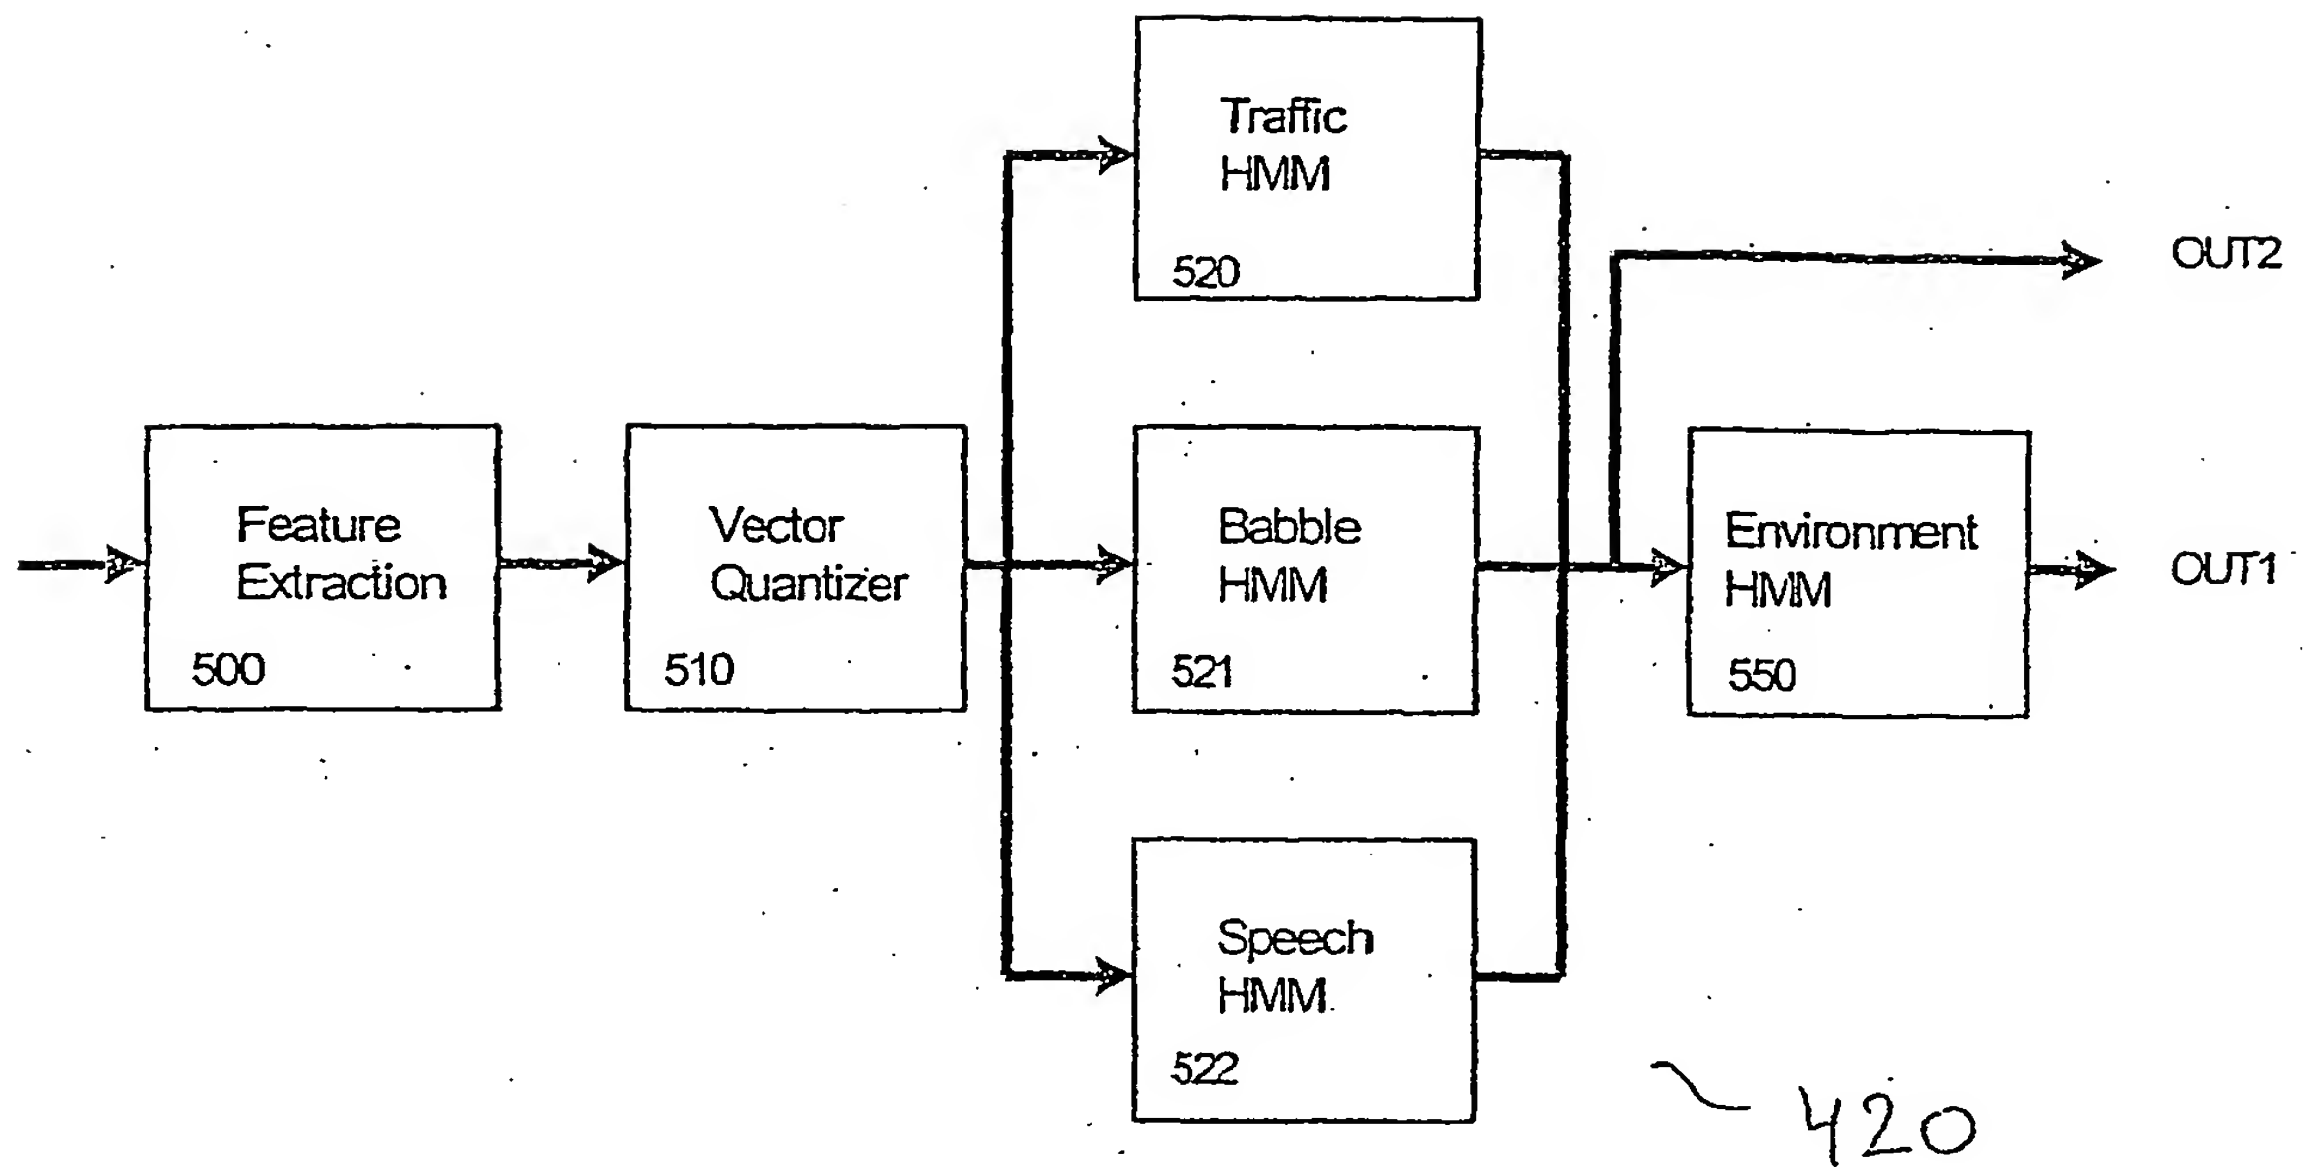
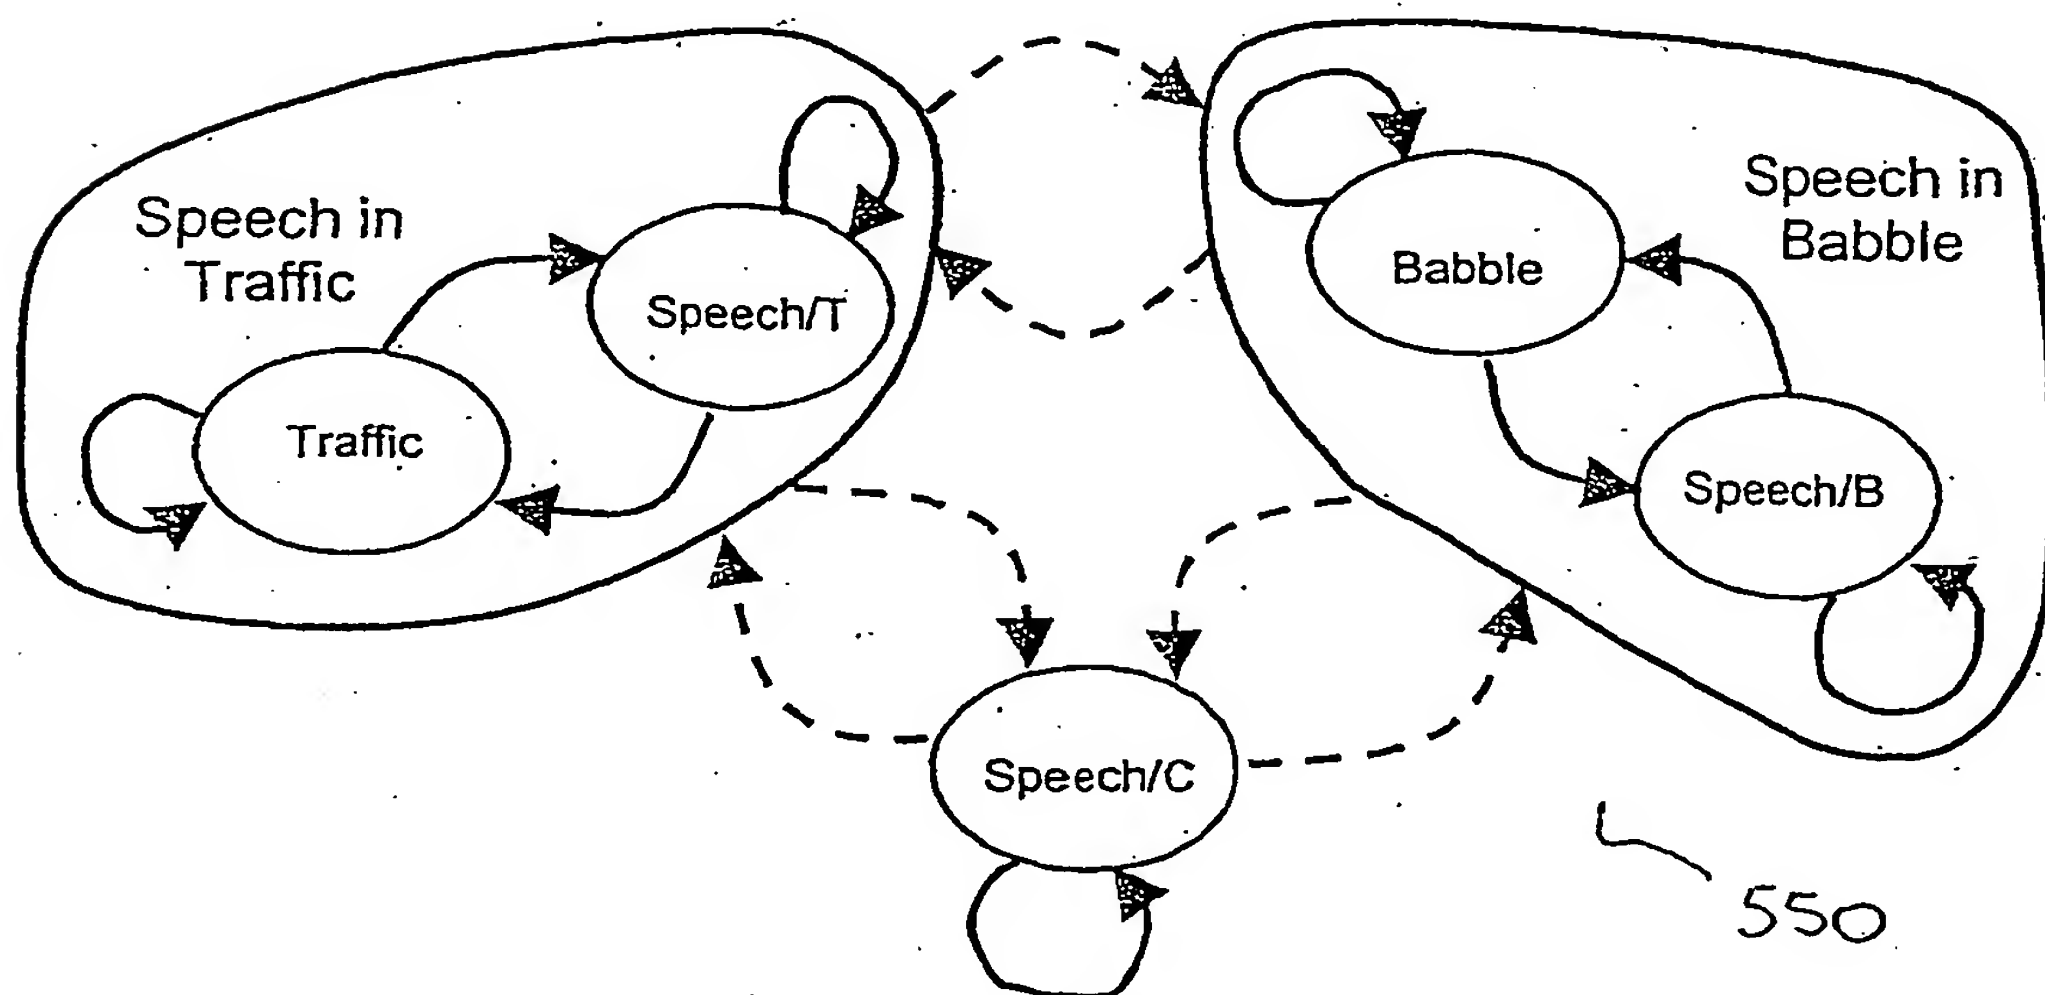FIG. 3

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   H04R25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7   H04R   G10L   G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 27787 A (TOEPHOLM & WESTERMANN ;BAEKGAARD LARS (DK)) 25 June 1998 (1998-06-25) page 3, line 3-7	1-3, 11-13, 17,20-23
A	page 4, line 17 -page 10, line 6 ---	5,9,10, 15,16
Y	EP 0 869 478 A (NIPPON ELECTRIC CO) 7 October 1998 (1998-10-07) page 2, line 11 -page 3, line 4	1-3, 11-13, 17,20-23
A	page 4, line 14 -page 6, line 12 --- -/--	4-7,9, 14,18,19

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed .

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 July 2001	18/07/2001

Name and mailing address of the ISA	Authorized officer .
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Zanti, P

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category°	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 12, 31 October 1998 (1998-10-31) -& JP 10 187183 A (NEC CORP), 14 July 1998 (1998-07-14)	1-3,17, 20-23
A	 abstract ----	4-7,9, 11,13, 14,18,19
A	US 5 535 305 A (CHOW YEN-LU ET AL) 9 July 1996 (1996-07-09) column 1, line 6-35 column 1, line 62 -column 2, line 27 column 3, line 37-60 column 4, line 24 -column 10, line 39 ---	1-23
A	EP 0 881 625 A (AT & T CORP) 2 December 1998 (1998-12-02) column 1, line 12 -column 4, line 50 column 6, line 26 -column 12, line 47 column 13, line 19 -column 14, line 50 -----	1-23

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9827787	A	25-06-1998	AT	193797 T	15-06-2000
			AU	725726 B	19-10-2000
			AU	1195397 A	15-07-1998
			DE	69608822 D	13-07-2000
			DE	69608822 T	30-11-2000
			DK	945044 T	16-10-2000
			EP	0945044 A	29-09-1999
			JP	3131226 B	31-01-2001
			JP	2000511367 T	29-08-2000
EP 0869478	A	07-10-1998	JP	3033514 B	17-04-2000
			JP	10274995 A	13-10-1998
			US	6092042 A	18-07-2000
JP 10187183	A	14-07-1998	JP	3039408 B	08-05-2000
US 5535305	A	09-07-1996	NONE		
EP 0881625	A	02-12-1998	US	5960397 A	28-09-1999
			CA	2233728 A	27-11-1998

This Page Blank (uspto)